

UNII-FLEX 2CM G®

The solid polyurethane Uni-Flex 2C Pig® is cast as a single piece construction. The flexible combination of cups and discs creates an effective pig for removing liquids from wet gas systems, water from product pipelines, and paraffin from the walls of crude oil pipelines.

Manufactured from high-performance polyurethane, it flexes through varying diameter pipelines, short-radius weld ells, tees, valves, dents and out-of-round pipe. Its hollow core allows the pig to expand in diameter thereby increasing its seal as the differential pressure across the pig increases and to center itself for even wear.



APPLICATIONS

- Condensate and Liquids from Wet Gas Pipelines
- Water from Product Pipelines
- Ideal for LPG Services
- Controlling Paraffin in Crude Oil Pipelines

FEATURES AND BENEFITS


- Available in Standard & High-Performance Polyurethane
- Single Piece Construction
- Available with Pull Ropes, Cables and Nylon Straps
- · Can be Configured for Multi-Diameters
- Available with Transmitter Cavity
- Features 2 Cups for Superior Sealing

www.inlineservices.com sales@inlineservcies.com





TECHNICAL DATA

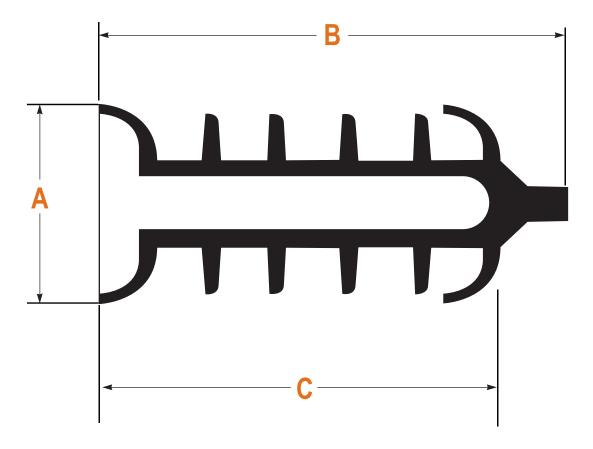

SIZE IN/MM	А	В	С	WEIGHT (Lbs.)
2" / 50mm	2.5"	5.5"	4.75"	0.37
4" / 100m	4.375"	7"	4"	2
6" /150mm	6.625"	18"	16"	7.25
8" / 100mm	8.5"	18.5"	15"	15
10" / 150mm	10.75"	19.5"	15"	21.25
12" / 200mm	13"	23.5"	18.5"	36
14" / 250mm	13.875"	26"	23"	47
16" / 300mm	15.875"	28"	24"	62
20" / 400mm	20"	35.5"	30"	118

Inline Services Inc. 27731 Commercial Park Rd Tomball TX 77375

phone: 281.401.8142 toll free: 888.973.0079 fax: 281.401.8147

www.inlineservices.com sales@inlineservices.com

US Patent No. D351,898 © 2005 Inline Services, Inc.