


RS-Transmitter

Why rent when you can buy!

Comparable to the size and strength of transmitters in the market today, RS-Transmitter is the world's first disposable pipeline pig transmitter. Conveniently available in four sizes to fit every pipeline pig.

	xSD	SD	MD	LD
Standard Run-Time ⁰	64 hours (2.5 days)	130 hours (5 days)	500 hours (21 days)	1200 hours (50 days)
Frequency ²	ELF - 22Hz			
Product Compatibility ³	Most Oil and Gas Petroleum products			
Pressure ⁴	1800 PSI	1800 PSI	1600 PSI	1800 PSI
Dimension L mm(in)	3" (76mm)	6" (152mm)	9.5" (241mm)	19" (480mm)
Dimension D mm(in)	1" (25.4mm)	1.25" (32mm)	1.875" (48mm)	3.5" (89mm)
Temperature ⁵	-40°F to 150°F (-40°C to 65°C)			
Mouting Options	Blank half rings on Delrin ⁶ cans			

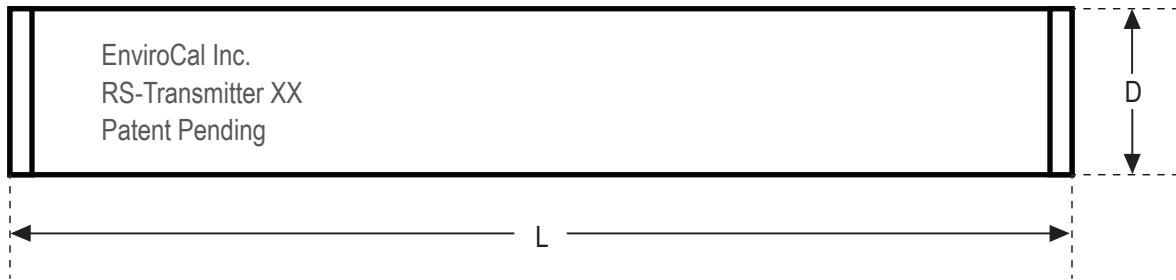

¹ Standard Run-Time is at 25°C. Continuous option available. Longer Run-Times possible with decreased pulse rate.

² Frequencies between 16 Hz and 30 Hz possible

³ Enquire for special product applications

⁴ Higher Pressure rating possible

⁵ Run-Times may vary below 32°F [0°C]

⁶ Delrin cans and half rings sold separately

